

BACK TO HOME



Modular system Signal Tower

- | Signal Tower System (Φ 70mm) with modular construction.
- | Easy Mount-up System (max 5 LED modules) without tool.
- | Minimized variation of modules: 5 LED Units• ~4 Base Units.
- | Latest LED modules in Red, Amber, Green, Blue and White.
- | Easy wiring with Screw-less terminal block.
- | Lenses are made of heat and shock resistant polycarbonate resin.
- | FB type: 2 different integral alarm sounds, volume adjustable 70-90dB (at 1m) **Alarm sound**
- | CE / UL / C-UL compliant for all models.
- | IP65
- | Operation temperature:
-3°C to 60°C(DC24V) / -25°C to 60°C(AC90-250V)
- | Shipped in modular style.

How to order

LED Module


Model	Color
LU7-E-R	Red
LU7-E-Y	Amber
LU7-E-G	Green
LU7-E-B	Blue
LU7-E-C	White

Basement Module


Model	Rated Voltage	Alarm / Flash
LU7-02	DC 24V	----
LU7-02FB	DC 24V	2 sound / Flash
LU7-M2	AC 90~ 250V	----
LU7-M2FB	AC 90~ 250V	2 sound / Flash


FB type: approx. 60 flashes per minute.

Dimensions

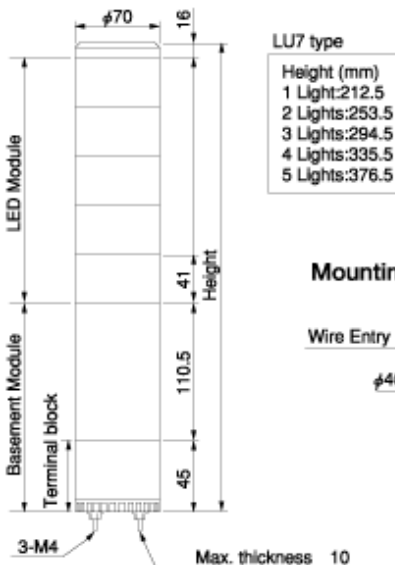

Terminal block (View from top)

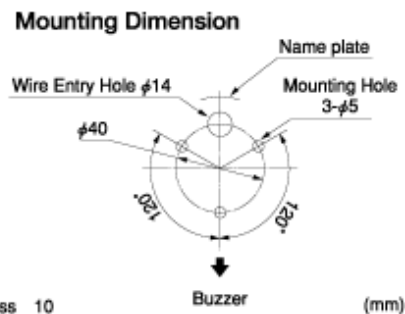

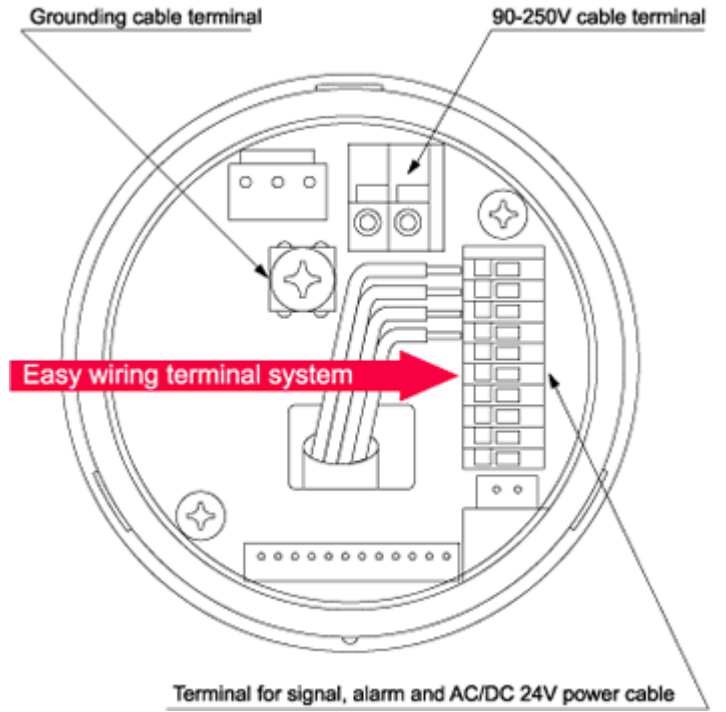

[↑ PAGE TOP](#)